



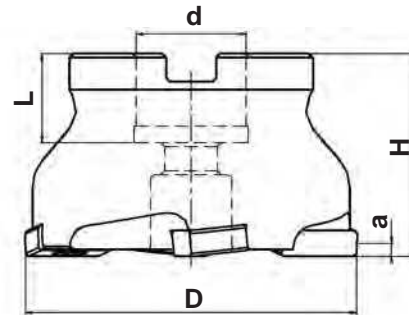


MT200S...LN19

Торцовые фрезы для чистового фрезерования



Нормальный шаг

Глубина резания до 1 мм

Обозначение	Размеры, мм					Z	n _{max} RPM	кг		Кол.		
	D	a	L	H	d							
MT200S-063A22R03LN19	63	1	20	40	22	3	6500	0,7	LNGQ1906...	3	T501455-20	7020-T 9,0 Nm
MT200S-080A27R04LN19	80	1	22	50	27	4	5500	1,2		4		
MT200S-100B32R04LN19	100	1	25	50	32	4	5000	1,7		4		
MT200S-125B40R05LN19	125	1	29	63	40	5	4500	3,2		5		
MT200S-160C40R06LN19	160	1	31	63	40	6	4000	5,0		6		
MT200S-200C60R06LN19	200	1	32	63	60	6	3500	7,7		6		
MT200S-250C60R08LN19	250	1	32	63	60	8	2500	18,0		8		
MT200S-315D60R10LN19	315	1	32	70	60	10	2200	32,0		10		

	Марка твердого сплава						Основные размеры					
	P		M	K	N	S	H	ic	l	S	d1	b
	HCP25	HWP20	HCP25					мм				
LNGQ1906ZZ	●		○					14,28	19,05	6,35	5,4	1,5
LNGQ1906ZZ-F		●						14,28	19,05	6,35	5,4	1,5

