



MT190T

Концевые фрезы для Т - образных пазов

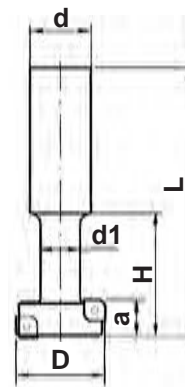

*Основное назначение - фрезерование Т - образных пазов.
 *СМП имеет четыре режущие кромки.
 *Фрезерование канавок в отверстиях.



MT190T-Z...MD09

Хвостовик - цилиндрический DIN 1835 A

Обозначение	Размеры, мм							n _{max} RPM	M _{kg}		Кол.		
	D	a	H	L	d	d1	Z						
MT190T-040Z20R02MD09-12	40	12	50	100	20	18	2	17500	0,3	MDHW0903..EN	4		7015-T 5,5 Nm
MT190T-040Z20R02MD09-14	40	14	50	100	20	18	2	17500	0,3				
MT190T-040Z20R02MD09-16	40	16	50	100	20	18	2	17500	0,3				
MT190T-050Z25R03MD09-12	50	12	60	116	25	19	3	16500	0,5				
MT190T-050Z25R03MD09-14	50	14	60	116	25	19	3	16500	0,5				
MT190T-050Z25R03MD09-16	50	16	60	116	25	19	3	16500	0,5				
MT190T-063Z25R03MD09-12	63	12	70	126	25	24	3	14500	0,6				
MT190T-063Z25R03MD09-14	63	14	70	126	25	24	3	14500	0,6				
MT190T-063Z25R03MD09-16	63	16	70	126	25	24	3	14500	0,6				
MT190T-080Z32R04MD09-12	80	12	80	140	32	30	4	12500	1,1				
MT190T-080Z32R04MD09-14	80	14	80	140	32	30	4	12500	1,1				
MT190T-080Z32R04MD09-16	80	16	80	140	32	30	4	12500	1,1				

*Возможно исполнение всех фрез с цилиндрическим хвостовиком типа "Weldon" DIN 1835 B.

	Марка твердого сплава						Основные размеры											
	P		M		K		N		S		H		ic	l	S	d1	r	α
	●	●	●	●	●	●	●	●	●	●	●	●	мм					
MDHW090320EN	●	●	●	●	●	●	●	●	●	●	●	9,2	9,2	3,18	4,4	2,0	15	
MDHW090325EN	●	●	●	●	●	●	●	●	●	●	●	9,2	9,2	3,18	4,4	2,5	15	
MDHW090330EN	●	●	●	●	●	●	●	●	●	●	●	9,2	9,2	3,18	4,4	3,0	15	

