

MT190T





MT190T

Концевые фрезы для Т - образных пазов



- *Основное назначение - фрезерование Т - образных пазов.
- *СМП имеет четыре режущие кромки.
- *Фрезерование канавок в отверстиях.

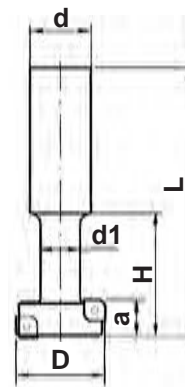

MT190T-Z...MD12

Хвостовик - цилиндрический DIN 1835 A

Обозначение	Размеры, мм							n _{max} RPM	kg		Кол.		
	D	a	H	L	d	d1	Z						
MT190T-080Z32R04MD12-16	80	16	80	140	32	30	4	11500	1,1	MDHW1204..N	8	T451155-20	7020-T 7,0 Nm
MT190T-080Z32R04MD12-18	80	18	80	140	32	30	4	11500	1,2				
MT190T-080Z32R04MD12-20	80	20	80	140	32	30	4	11500	1,3				
MT190T-080Z32R04MD12-22	80	22	80	140	32	30	4	11500	1,4				
MT190T-100Z32R04MD12-16	100	16	80	140	32	30	4	9500	1,5				
MT190T-100Z32R04MD12-18	100	18	80	140	32	30	4	9500	1,6				
MT190T-100Z32R04MD12-20	100	20	80	140	32	30	4	9500	1,7				
MT190T-100Z32R04MD12-22	100	22	80	140	32	30	4	9500	1,8				

*Возможно исполнение всех фрез с цилиндрическим хвостовиком типа "Weldon" DIN 1835 B.

	Марка твердого сплава										Основные размеры							
	P		M		K		N		S		H		ic	I	S	d1	r	α
	ИСП35U		ИСП35U				HWN15	HCN10										
MDHW120430EN	●		●										12,1	12,1	4,76	5,5	3,0	15
MDHW120430FN-AL							●	●					12,1	12,1	4,76	5,5	3,0	15
MDHW120440EN	●		●										12,1	12,1	4,76	5,5	4,0	15
MDHW120440FN-AL							●	●					12,1	12,1	4,76	5,5	4,0	15