


MT190VB-T

Концевые фрезы с центральным зубом

	диапазон	мм
	$D \leq 12$	-0,02
	$D > 12$	-0,03
	$4 \leq d \leq 6$	-0,008
	$8 \leq d \leq 10$	-0,009
	$12 \leq d \leq 16$	-0,011
	$20 \leq d \leq 25$	-0,013
	$\pm 0,015$	

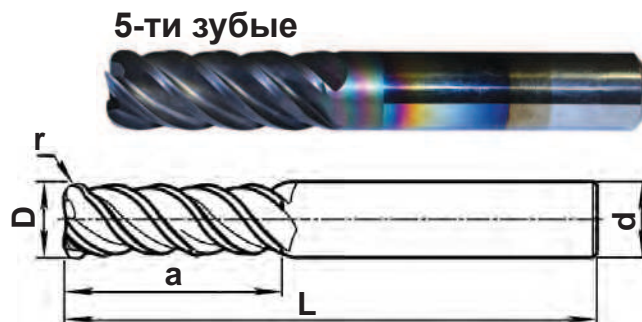

Цилиндрический хвостовик DIN 1835A

Длинное исполнение, радиус при вершине зуба

Обозначение	Размеры, мм					Z	Код заказа
	D	d	a	L	r		
MT190VB-016Z16R05-75-L150-r05-T	16	16	75	150	0,5	5	T-TLR516-05
MT190VB-016Z16R05-75-L150-r10-T	16	16	75	150	1	5	T-TLR516-10
MT190VB-016Z16R05-75-L150-r15-T	16	16	75	150	1,5	5	T-TLR516-15
MT190VB-016Z16R05-75-L150-r20-T	16	16	75	150	2	5	T-TLR516-20
MT190VB-016Z16R05-75-L150-r25-T	16	16	75	150	2,5	5	T-TLR516-25
MT190VB-016Z16R05-75-L150-r30-T	16	16	75	150	3	5	T-TLR516-30
MT190VB-016Z16R05-75-L150-r40-T	16	16	75	150	4	5	T-TLR516-40
MT190VB-018Z18R05-75-L150-r05-T	18	18	75	150	0,5	5	T-TLR518-05
MT190VB-018Z18R05-75-L150-r10-T	18	18	75	150	1	5	T-TLR518-10
MT190VB-018Z18R05-75-L150-r15-T	18	18	75	150	1,5	5	T-TLR518-15
MT190VB-018Z18R05-75-L150-r20-T	18	18	75	150	2	5	T-TLR518-20
MT190VB-018Z18R05-75-L150-r25-T	18	18	75	150	2,5	5	T-TLR518-25
MT190VB-018Z18R05-75-L150-r30-T	18	18	75	150	3	5	T-TLR518-30
MT190VB-018Z18R05-75-L150-r40-T	18	18	75	150	4	5	T-TLR518-40
MT190VB-020Z20R05-75-L160-r05-T	20	20	75	160	0,5	5	T-TLR520-05
MT190VB-020Z20R05-75-L160-r10-T	20	20	75	160	1	5	T-TLR520-10
MT190VB-020Z20R05-75-L160-r15-T	20	20	75	160	1,5	5	T-TLR520-15
MT190VB-020Z20R05-75-L160-r20-T	20	20	75	160	2	5	T-TLR520-20
MT190VB-020Z20R05-75-L160-r25-T	20	20	75	160	2,5	5	T-TLR520-25
MT190VB-020Z20R05-75-L160-r30-T	20	20	75	160	3	5	T-TLR520-30
MT190VB-020Z20R05-75-L160-r40-T	20	20	75	160	4	5	T-TLR520-40
MT190VB-020Z20R05-75-L160-r50-T	20	20	75	160	5	5	T-TLR520-50
MT190VB-020Z20R05-75-L160-r60-T	20	20	75	160	6	5	T-TLR520-60
MT190VB-025Z25R05-75-L160-r05-T	25	25	75	160	0,5	5	T-TLR525-05
MT190VB-025Z25R05-75-L160-r10-T	25	25	75	160	1	5	T-TLR525-10
MT190VB-025Z25R05-75-L160-r15-T	25	25	75	160	1,5	5	T-TLR525-15
MT190VB-025Z25R05-75-L160-r20-T	25	25	75	160	2	5	T-TLR525-20
MT190VB-025Z25R05-75-L160-r25-T	25	25	75	160	2,5	5	T-TLR525-25
MT190VB-025Z25R05-75-L160-r30-T	25	25	75	160	3	5	T-TLR525-30
MT190VB-025Z25R05-75-L160-r40-T	25	25	75	160	4	5	T-TLR525-40
MT190VB-025Z25R05-75-L160-r50-T	25	25	75	160	5	5	T-TLR525-50
MT190VB-025Z25R05-75-L160-r60-T	25	25	75	160	6	5	T-TLR525-60

*Возможно изготовление фрез с цилиндрическим хвостовиком с лысками типа «Weldon» (DIN 1835B)
Код заказа для фрез с хвостовиком «Weldon» - T-TLR5...W-..., например: T-TLR518W-20

