


## MT190VBE-T

Концевые фрезы с центральным зубом с удлиненной рабочей частью с шейкой

	диапазон	мм
	D ≤ 12	-0,02
	D > 12	-0,03
	4 ≤ d ≤ 6	-0,008
	8 ≤ d ≤ 10	-0,009
	12 ≤ d ≤ 16	-0,011
	20 ≤ d ≤ 25	-0,013
	± 0,015	



5-ти зубые

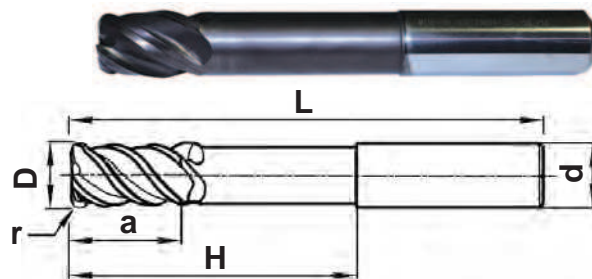

Цилиндрический хвостовик DIN 1835A

Длинное исполнение, радиус при вершине зуба

Обозначение	Размеры, мм							Код заказа
	D	d	a	L	H	r	Z	
MT190VBE-016Z16R05-32-H102-L150-r05-T	16	16	32	150	102	0,5	5	T-TNR516-05
MT190VBE-016Z16R05-32-H102-L150-r10-T	16	16	32	150	102	1	5	T-TNR516-10
MT190VBE-016Z16R05-32-H102-L150-r15-T	16	16	32	150	102	1,5	5	T-TNR516-15
MT190VBE-016Z16R05-32-H102-L150-r20-T	16	16	32	150	102	2	5	T-TNR516-20
MT190VBE-016Z16R05-32-H102-L150-r25-T	16	16	32	150	102	2,5	5	T-TNR516-25
MT190VBE-016Z16R05-32-H102-L150-r30-T	16	16	32	150	102	3	5	T-TNR516-30
MT190VBE-016Z16R05-32-H102-L150-r40-T	16	16	32	150	102	4	5	T-TNR516-40
MT190VBE-018Z18R05-32-H102-L150-r05-T	18	18	32	150	102	0,5	5	T-TNR518-05
MT190VBE-018Z18R05-32-H102-L150-r10-T	18	18	32	150	102	1	5	T-TNR518-10
MT190VBE-018Z18R05-32-H102-L150-r15-T	18	18	32	150	102	1,5	5	T-TNR518-15
MT190VBE-018Z18R05-32-H102-L150-r20-T	18	18	32	150	102	2	5	T-TNR518-20
MT190VBE-018Z18R05-32-H102-L150-r25-T	18	18	32	150	102	2,5	5	T-TNR518-25
MT190VBE-018Z18R05-32-H102-L150-r30-T	18	18	32	150	102	3	5	T-TNR518-30
MT190VBE-018Z18R05-32-H102-L150-r40-T	18	18	32	150	102	4	5	T-TNR518-40
MT190VBE-020Z20R05-38-H110-L160-r05-T	20	20	38	160	110	0,5	5	T-TNR520-05
MT190VBE-020Z20R05-38-H110-L160-r10-T	20	20	38	160	110	1	5	T-TNR520-10
MT190VBE-020Z20R05-38-H110-L160-r15-T	20	20	38	160	110	1,5	5	T-TNR520-15
MT190VBE-020Z20R05-38-H110-L160-r20-T	20	20	38	160	110	2	5	T-TNR520-20
MT190VBE-020Z20R05-38-H110-L160-r25-T	20	20	38	160	110	2,5	5	T-TNR520-25
MT190VBE-020Z20R05-38-H110-L160-r30-T	20	20	38	160	110	3	5	T-TNR520-30
MT190VBE-020Z20R05-38-H110-L160-r40-T	20	20	38	160	110	4	5	T-TNR520-40
MT190VBE-020Z20R05-38-H110-L160-r50-T	20	20	38	160	110	5	5	T-TNR520-50
MT190VBE-020Z20R05-38-H110-L160-r60-T	20	20	38	160	110	6	5	T-TNR520-60
MT190VBE-025Z25R05-45-H104-L160-r05-T	25	25	45	160	104	0,5	5	T-TNR525-05
MT190VBE-025Z25R05-45-H104-L160-r10-T	25	25	45	160	104	1	5	T-TNR525-10
MT190VBE-025Z25R05-45-H104-L160-r15-T	25	25	45	160	104	1,5	5	T-TNR525-15
MT190VBE-025Z25R05-45-H104-L160-r20-T	25	25	45	160	104	2	5	T-TNR525-20
MT190VBE-025Z25R05-45-H104-L160-r25-T	25	25	45	160	104	2,5	5	T-TNR525-25
MT190VBE-025Z25R05-45-H104-L160-r30-T	25	25	45	160	104	3	5	T-TNR525-30
MT190VBE-025Z25R05-45-H104-L160-r40-T	25	25	45	160	104	4	5	T-TNR525-40
MT190VBE-025Z25R05-45-H104-L160-r50-T	25	25	45	160	104	5	5	T-TNR525-50
MT190VBE-025Z25R05-45-H104-L160-r60-T	25	25	45	160	104	6	5	T-TNR525-60

\*Возможно изготовление фрез с цилиндрическим хвостовиком с лысками типа «Weldon» (DIN 1835B)

Код заказа для фрез с хвостовиком «Weldon» - T-TNR5...W-..., например: T-TNR518W-15

