


## MT190V-T

### Концевые фрезы

	диапазон	мм
	D ≤ 12	-0,02
	D > 12	-0,03
	4 ≤ d ≤ 6	-0,008
	8 ≤ d ≤ 10	-0,009
	12 ≤ d ≤ 16	-0,011
	20 ≤ d ≤ 25	-0,013
	± 0,015	



7-ми зубье

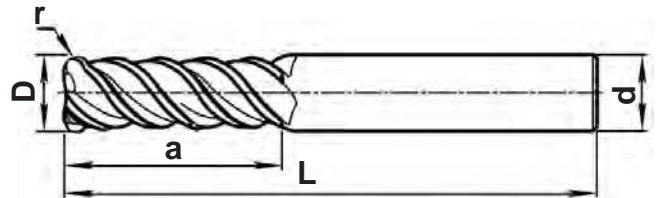

Цилиндрический хвостовик DIN 1835A

Длинное исполнение, радиус при вершине зуба

Обозначение	Размеры, мм					Z	Код заказа
	D	d	a	L	r		
MT190V-018Z18R07-75-L150-r05-T	18	18	75	150	0,5	7	T-TLR718-05
MT190V-018Z18R07-75-L150-r10-T	18	18	75	150	1	7	T-TLR718-10
MT190V-018Z18R07-75-L150-r15-T	18	18	75	150	1,5	7	T-TLR718-15
MT190V-018Z18R07-75-L150-r20-T	18	18	75	150	2	7	T-TLR718-20
MT190V-018Z18R07-75-L150-r25-T	18	18	75	150	2,5	7	T-TLR718-25
MT190V-018Z18R07-75-L150-r30-T	18	18	75	150	3	7	T-TLR718-30
MT190V-018Z18R07-75-L150-r40-T	18	18	75	150	4	7	T-TLR718-40
MT190V-020Z20R07-75-L160-r05-T	20	20	75	160	0,5	7	T-TLR720-05
MT190V-020Z20R07-75-L160-r10-T	20	20	75	160	1	7	T-TLR720-10
MT190V-020Z20R07-75-L160-r15-T	20	20	75	160	1,5	7	T-TLR720-15
MT190V-020Z20R07-75-L160-r20-T	20	20	75	160	2	7	T-TLR720-20
MT190V-020Z20R07-75-L160-r25-T	20	20	75	160	2,5	7	T-TLR720-25
MT190V-020Z20R07-75-L160-r30-T	20	20	75	160	3	7	T-TLR720-30
MT190V-020Z20R07-75-L160-r40-T	20	20	75	160	4	7	T-TLR720-40
MT190V-020Z20R07-75-L160-r50-T	20	20	75	160	5	7	T-TLR720-50
MT190V-020Z20R07-75-L160-r60-T	20	20	75	160	6	7	T-TLR720-60
MT190V-025Z25R07-75-L160-r05-T	25	25	75	160	0,5	7	T-TLR725-05
MT190V-025Z25R07-75-L160-r10-T	25	25	75	160	1	7	T-TLR725-10
MT190V-025Z25R07-75-L160-r15-T	25	25	75	160	1,5	7	T-TLR725-15
MT190V-025Z25R07-75-L160-r20-T	25	25	75	160	2	7	T-TLR725-20
MT190V-025Z25R07-75-L160-r25-T	25	25	75	160	2,5	7	T-TLR725-25
MT190V-025Z25R07-75-L160-r30-T	25	25	75	160	3	7	T-TLR725-30
MT190V-025Z25R07-75-L160-r40-T	25	25	75	160	4	7	T-TLR725-40
MT190V-025Z25R07-75-L160-r50-T	25	25	75	160	5	7	T-TLR725-50
MT190V-025Z25R07-75-L160-r60-T	25	25	75	160	6	7	T-TLR725-60

\*Возможно изготовление фрез с цилиндрическим хвостовиком с лысками типа «Weldon» (DIN 1835B)  
Код заказа для фрез с хвостовиком «Weldon» - T-TLR7...W-..., например: T-TLR720-10W

