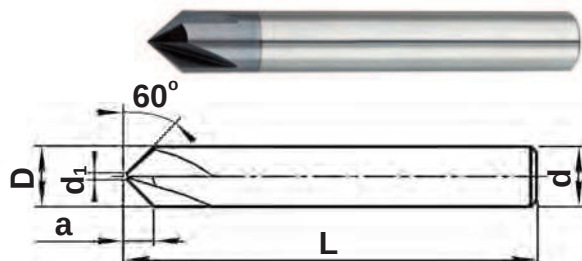


MT160V

Конические концевые фрезы для обработки фасок

	диапазон	мм
	D ≤ 12	-0,02
	D > 12	-0,03
	4 ≤ d ≤ 6	-0,008
	8 ≤ d ≤ 10	-0,009
	12 ≤ d ≤ 16	-0,011
	20 ≤ d ≤ 25	-0,013
	+0,1	


4-х зубые

Цилиндрический хвостовик DIN 1835A
Нормальное исполнение

Обозначение	Размеры, мм						Код заказа		
	D	d	a	L	d ₁	Z	без покрытия	TAS	TAD
MT160V-004Z06R04-03-L057	4	6	3	57	0,5	4	C-USK404F-60	C-SSK404F-60	C-TSK404F-60
MT160V-005Z06R04-03-L057	5	6	3	57	1,5	4	C-USK405F-60	C-SSK405F-60	C-TSK405F-60
MT160V-006Z06R04-04-L057	6	6	4	57	1,4	4	C-USK406F-60	C-SSK406F-60	C-TSK406F-60
MT160V-008Z08R04-06-L063	8	8	6	63	1	4	C-USK408F-60	C-SSK408F-60	C-TSK408F-60
MT160V-010Z10R04-08-L072	10	10	8	72	0,8	4	C-USK410F-60	C-SSK410F-60	C-TSK410F-60
MT160V-012Z12R04-09-L083	12	12	9	83	1,6	4	C-USK412F-60	C-SSK412F-60	C-TSK412F-60
MT160V-014Z14R04-11-L083	14	14	11	83	1,3	4	C-USK414F-60	C-SSK414F-60	C-TSK414F-60
MT160V-016Z16R04-13-L092	16	16	13	92	1	4	C-USK416F-60	C-SSK416F-60	C-TSK416F-60
MT160V-018Z18R04-14-L092	18	18	14	92	1,8	4	C-USK418F-60	C-SSK418F-60	C-TSK418F-60
MT160V-020Z20R04-16-L104	20	20	16	104	1,5	4	C-USK620F-60	C-SSK620F-60	C-TSK620F-60
MT160V-025Z25R04-20-L121	25	25	20	121	2	4	C-USK425F-60	C-SSK425F-60	C-TSK425F-60

*Возможно изготовление фрез с цилиндрическим хвостовиком с лысками типа «Weldon» (DIN 1835B)

Код заказа для фрез с хвостовиком «Weldon» - C-...SK4...FW-060, например: **C-SSK408FW-060**

