


Оправки комбинированные 7/24 DIN 2080 для насадных фрез

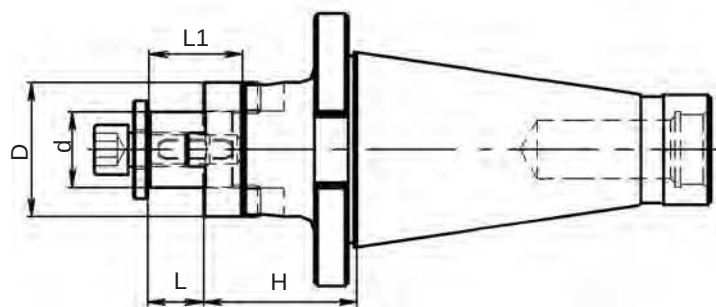


TH-SK40...S...H

Обозначение	Размеры, мм					
	SK	d	D	H	L	L1
TH-SK40S16H052	40	16	32	52	17	27
TH-SK40S22H052	40	22	40	52	19	31
TH-SK40S27H052	40	27	48	52	21	33
TH-SK40S32H052	40	32	58	52	24	38
TH-SK40S32H075	40	32	58	75	24	38
TH-SK40S40H052	40	40	70	52	27	41
TH-SK40S40H075	40	40	70	75	27	41
TH-SK40S50H052	40	50	90	52	30	46

TH-SK50...S...H

TH-SK50S16H055	50	16	32	55	17	27
TH-SK50S22H055	50	22	40	55	19	31
TH-SK50S27H055	50	27	48	55	21	33
TH-SK50S32H055	50	32	58	55	24	38
TH-SK50S40H055	50	40	70	55	27	41
TH-SK50S50H055	50	50	90	55	30	46
TH-SK50S60H080	50	60	110	80	36	52

Оправки 7/24 DIN 2080 для торцовых фрез с посадкой форм А, В и С

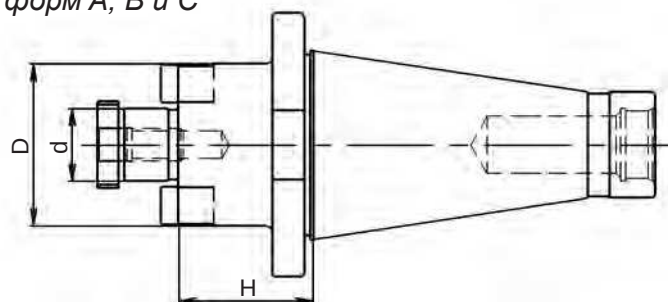

TH-SK40...A,B,C...H

Обозначение	Размеры, мм			
	SK	d	D	H
TH-SK40A22H030	40	22	48	30
TH-SK40B27H017	40	27	60	17
TH-SK40B27H030	40	27	60	30
TH-SK40B32H017	40	32	78	17
TH-SK40B32H030	40	32	78	30
TH-SK40C40H030	40	40	89	30

TH-SK50...A,B,C...H

TH-SK50A22H035	50	22	48	35
TH-SK50B27H035	50	27	60	35
TH-SK50B32H040	50	32	78	40
TH-SK50B40H033	50	40	72	33
TH-SK50C40H050	50	40	89	50
TH-SK50C60H055	50	60	129	55