


Патроны сверлильные высокоточные 7/24 DIN 2080

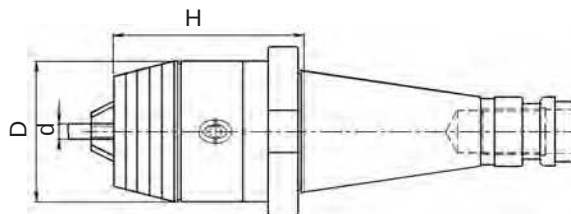


TH-SK40...D...H

Обозначение	Размеры, мм			
	SK	d	D	H
TH-SK40D08H062	40	0,5-8	36	62
TH-SK40D13H083	40	1-13	50	83
TH-SK40D16H084	40	3-16	57	84

TH-SK50...D...H

TH-SK50D13H100	50	1-13	50	100
TH-SK50D16H100	50	3-16	57	100

Патроны цанговые 7/24 DIN 2080 системы OZ

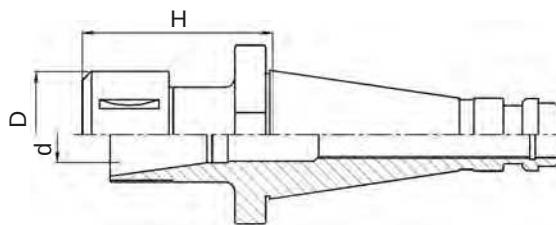

TH-SK40...Z...H

Обозначение	Размеры, мм				Цанга
	SK	d	D	H	
TH-SK40Z16H070	40	2-16	43	70	OZ 16
TH-SK40Z25H070	40	2-25	60	70	OZ 25
TH-SK40Z25H120	40	2-25	60	120	OZ 25
TH-SK40Z32H090	40	3-32	72	90	OZ 32


TH-SK50...Z...H

TH-SK50Z25H070	50	2-25	60	70	OZ 25
TH-SK50Z32H080	50	3-32	72	80	OZ 32
TH-SK50Z32H120	50	3-32	72	120	OZ 32

Выбор цанги

стр. l41

Патроны резьбонарезные 7/24 DIN 2080

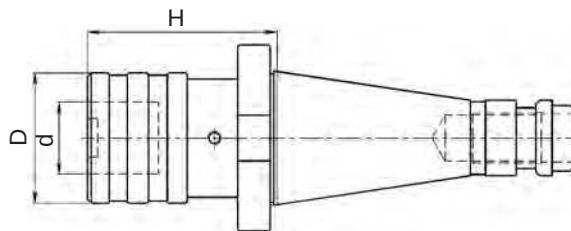

TH-SK40...M-M

Обозначение	Размеры, мм				Размер	Резьба
	SK	d	D	H		
TH-SK40M3-M12	40	19	38	52	1	M3-M12
TH-SK40M8-M20	40	31	53	77	2	M8-M20
TH-SK40M14-M32	40	48	78	118	3	M14-M32

TH-SK50...M-M

TH-SK50M3-M12	50	19	38	60	1	M3-M12
TH-SK50M8-M20	50	31	53	79	2	M8-M20
TH-SK50M14-M32	50	48	78	125	3	M14-M32

Вставки
резьбонарезные

стр. l42