


Вспомогательный инструмент СКИФ-М с хвостовиком HSK DIN 69893, форма А

Оправки HSK DIN 69893 для концевых фрез с хвостовиком типа Weldon

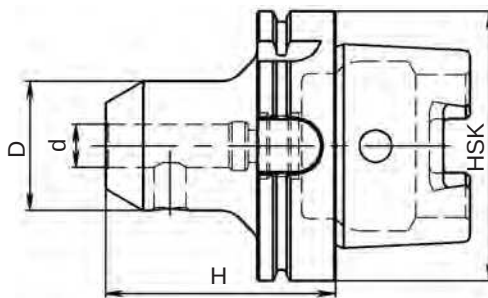

TH-HA063...W...H нормальное исполнение $n_{max} = 8\,000$ об/мин

Обозначение	Размеры, мм			
	HSK	d	D	H
TH-HA063W06H065	63	6	25	65
TH-HA063W08H065	63	8	28	65
TH-HA063W10H065	63	10	35	65
TH-HA063W12H080	63	12	42	80
TH-HA063W14H080	63	14	44	80
TH-HA063W16H080	63	16	48	80
TH-HA063W18H080	63	18	50	80
TH-HA063W20H080	63	20	52	80
TH-HA063W25H110	63	25	65	110
TH-HA063W32H110	63	32	72	110


TH-HA100...W...H нормальное исполнение $n_{max} = 8\,000$ об/мин

TH-HA100W06H090	100	6	25	90
TH-HA100W08H090	100	8	28	90
TH-HA100W10H090	100	10	35	90
TH-HA100W12H100	100	12	42	100
TH-HA100W14H100	100	14	44	100
TH-HA100W16H100	100	16	48	100
TH-HA100W18H100	100	18	50	100
TH-HA100W20H110	100	20	52	110
TH-HA100W25H120	100	25	65	120
TH-HA100W32H120	100	32	72	120
TH-HA100W40H120	100	40	80	120

TH-HA125...W...H нормальное исполнение $n_{max} = 8\,000$ об/мин

TH-HA125W25H110	125	25	65	110
TH-HA125W32H120	125	32	72	120
TH-HA125W40H120	125	40	80	120
TH-HA125W50H130	125	50	100	130

Винт
крепления "Weldon"



d, мм	G, мм	L, мм
6	M 6	10
8	M 8	10
10	M 10	12
12	M 12	16
14	M 12	16
16	M 14	16
18	M 14	16
20	M 16	16
22	M 16	16
25	M 18x2	20
32	M 20x2	20
40	M 20x2	25
50	M 24x2	25