


Оправки балансируемые HSK DIN 69893 для торцовых фрез с посадкой формы А с внутренней подачей СОЖ

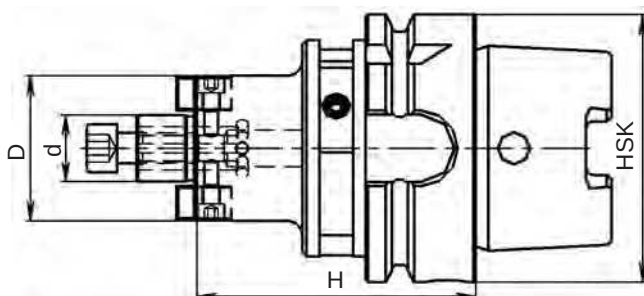

TH-HA063...A...H...ADG2.5

балансируемые $n_{max} = 25\ 000$ об/мин G2.5

Обозначение	Размеры, мм			
	HSK	d	D	H
TH-HA063A16H045ADG2.5	63	16	38	45
TH-HA063A16H145ADG2.5	63	16	38	145
TH-HA063A22H055ADG2.5	63	22	48	55
TH-HA063A22H150ADG2.5	63	22	48	150
TH-HA063A27H060ADG2.5	63	27	60	60
TH-HA063A27H155ADG2.5	63	27	60	155
TH-HA063A32H060ADG2.5	63	32	78	60

TH-HA063...A...H...ADG2.5

балансируемые $n_{max} = 20\ 000$ об/мин G2.5

TH-HA063A32H155ADG2.5	63	32	78	155
TH-HA063A40H060ADG2.5	63	40	89	60

TH-HA100...A...H...ADG2.5

балансируемые $n_{max} = 20\ 000$ об/мин G2.5

TH-HA100A16H055ADG2.5	100	16	38	55
TH-HA100A22H055ADG2.5	100	22	48	55
TH-HA100A27H055ADG2.5	100	27	60	55
TH-HA100A32H060ADG2.5	100	32	78	60
TH-HA100A40H060ADG2.5	100	40	89	60

Балансировочный элемент



HSK63 B510805

HSK100 B840805

Винт балансировки



H600500-30

Ключ балансировки



7003H