


Патроны сверлильные высокоточные HSK DIN 69893

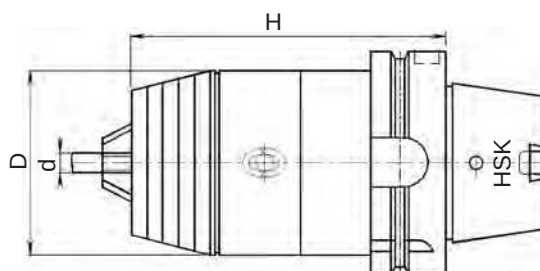


TH-HA063...D...H

Обозначение	Размеры, мм			
	HSK	d	D	H
TH-HA063D13H110	63	1-13	50	110
TH-HA063D16H115	63	3-16	57	115
TH-HA063D13H110AD	63	1-13	50	110
TH-HA063D16H115AD	63	3-16	57	115

TH-HA100...D...H

TH-HA100D13H117	100	1-13	50	117
TH-HA100D16H122	100	3-16	57	122
TH-HA100D13H117AD	100	1-13	50	117
TH-HA100D16H122AD	100	3-16	57	122

Патроны цанговые балансируемые HSK DIN 69893 системы OZ

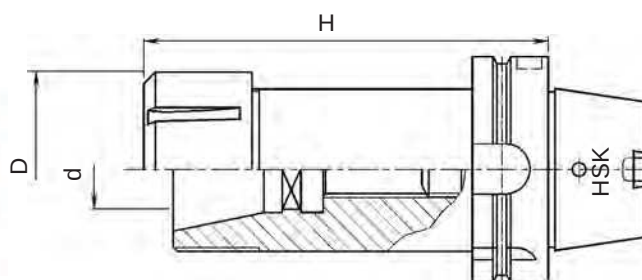

TH-HA063...Z...H...G2.5

$n_{max} = 20000$ об/мин

Обозначение	Размеры, мм				Цанга
	HSK	d	D	H	
TH-HA063Z16H080G2.5	63	2-16	43	80	OZ 16
TH-HA063Z25H080G2.5	63	2-25	60	80	OZ 25
TH-HA063Z25H130G2.5	63	2-25	60	130	OZ 25
TH-HA063Z32H100G2.5	63	3-32	72	100	OZ 32

TH-HA100...Z...H...G2.5

TH-HA100Z25H095G2.5	100	2-25	60	95	OZ 25
TH-HA100Z32H100G2.5	100	3-32	72	100	OZ 32

Выбор цанги
стр. 141

Балансировочный элемент



HSK63 B510805

HSK100 B840805

Винт балансировки



H600500-30

Ключ балансировки



7003H