




СКИФ-М

Оправки

Ключи к оправкам для торцовых и насадных фрез DIN 6368

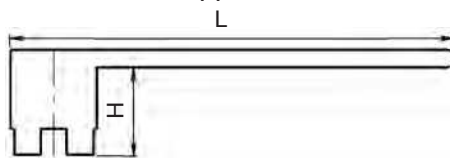


TK...H... DIN 6368

Обозначение	Размеры, мм		
	d*	L	H
TK13H16	13	160	16
TK16H20	16	180	20
TK22H25	22	200	25
TK27H32	27	225	32
TK32H36	32	250	36
TK40H40	40	280	40
TK50H45	50	315	45
TK60H50	60	355	50

* d- посадочный размер торцевой фрезы


Кольцо-шпонка по DIN 6366



d...-D... DIN 6366

Обозначение	Размеры, мм				
	d	D	S	b	h
d16-D32	16	32	10	8	5,0
d22-D40	22	40	12	10	5,6
d27-D48	27	48	12	12	6,3
d32-D58	32	58	14	14	7,0
d40-D70	40	70	14	16	8,0
d50-D90	50	90	16	18	9,0
d60-D90	60	110	16	20	10,0

Центральные зажимные болты MAS BT




G-BT40G...A... MAS BT 403

Обозначение	Размеры, мм					
	BT	D	h	H	g	a
G-BT40G16A45	40	15	35	60	M 16	45°
G-BT40G16A60	40	15	35	60	M 16	60°
G-BT40G16A90	40	15	35	60	M 16	90°

G-BT50G...A... MAS BT 403

Обозначение	BT	D	h	H	g	a
G-BT50G24A45	50	23	45	85	M 24	45°
G-BT50G24A60	50	23	45	85	M 24	60°
G-BT50G24A90	50	23	45	85	M 24	90°

Центральные зажимные болты DIN 69872



G-NC40G... DIN 69872

Обозначение	Размеры, мм					
	NC	D	h	H	g	a
G-NC40G16AD	40	19	26	54	M 16	15°
G-NC40G16	40	19	26	54	M 16	15°

G-NC50G... DIN 69872

Обозначение	NC	D	h	H	g	a
G-NC50G24AD	50	28	34	74	M 24	15°
G-NC50G24	50	28	34	74	M 24	15°