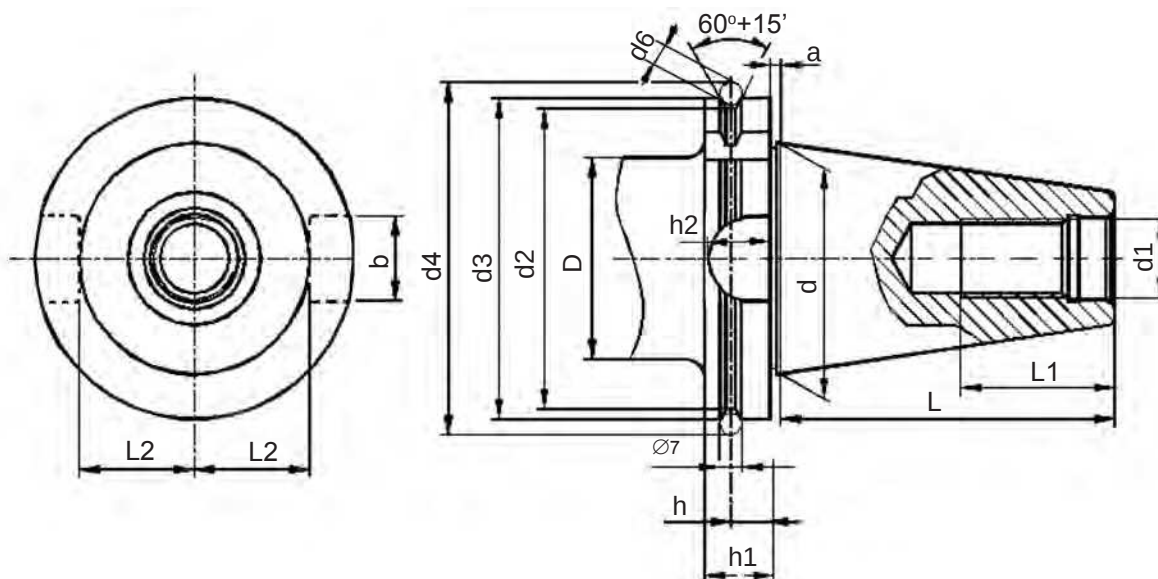
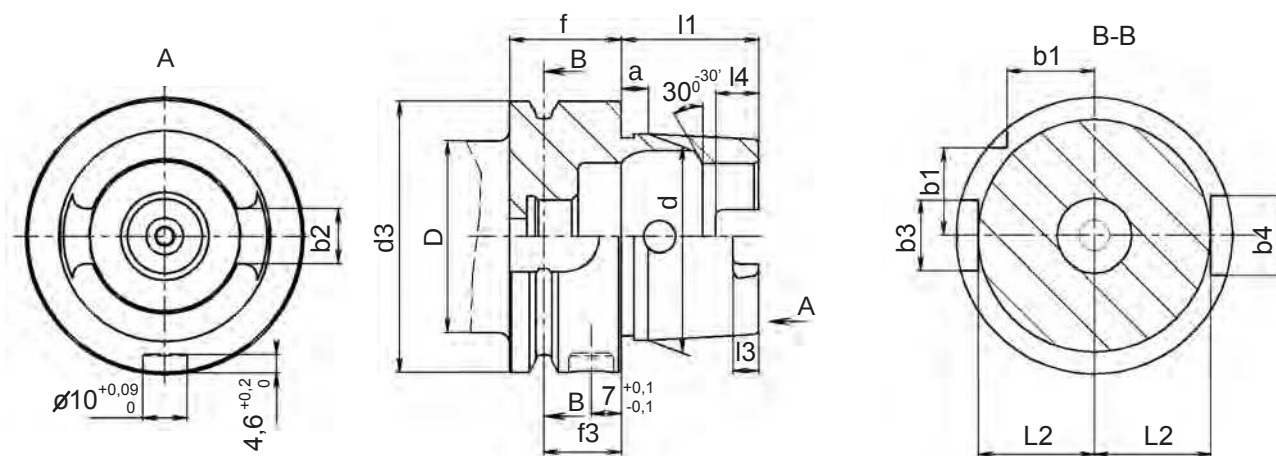


BT - Метрический конус 7/24 для станков с ЧПУ по стандарту Японии (MAS BT 403)

BT	$a^{+0,4}_{-0,4}$	b_{H12}	h_2	d	d_1	$d_2^{0}_{-0,5}$	$d_3^{0}_{-0,1}$	$d_4^{0}_{-0,05}$	D_{max}	$h^{+0,1}_{-0,1}$	$h_1^{0}_{-0,1}$	$L^{0}_{-0,3}$	L_{1min}	$L_2^{0}_{-0,4}$	d_1
40	2	16,1	21	44,45	M16	53	63	75,68	50	16,6	27	65,4	30	22,6	10
45	3	19,3	26	57,15	M20	73	85	100,22	63	21,2	33	82,8	38	29,1	21
50	3	25,7	31	69,85	M24	85	100	119,02	80	23,2	38	101,8	45	35,4	15

H...A - Хвостовик полый конический типа HSK DIN 69893, форма A

H...A	a	$b_1^{0}_{-0,3}$	$b_1^{+0,4}_{-0,4}$	b_3_{H10}	b_4_{H10}	d	d_3_{H10}	D_{max}	$f^{0}_{-0,1}$	$f_3^{0}_{-0,1}$	$I_1^{0}_{-0,2}$	$L_2^{0}_{-0,2}$	$I_3^{0}_{-0,2}$	$I_4^{+0,2}_{0}$
63	6,3	20	12,54	16	18	48	63	53	26	18	32	26,5	6	10
80	8	25	16,04	18	20	60	80	67	26	18	40	34	8	12
100	10	31,5	20,02	20	22	75	100	85	29	20	50	44	10	15
125	12,5	39,5	25,02	25	28	95	125	105	29	20	63	55,5	12	19
160	16	50	30,02	32	36	120	160	130	31	22	80	72	16	23