



## MT245...SN12

### Торцовые фрезы 45°



- \*Экономичная конструкция.
- \*Положительная геометрия.
- \*Низкие силы резания.
- \*8 эффективных режущих кромок.

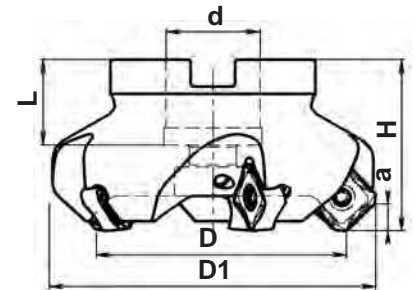

#### Крупный шаг

Глубина резания до 6 мм

Обозначение	Размеры, мм						Z	nmax RPM	kg		Кол.		
	D	a	D1	L	H	d							
MT245-050A22R04SN12	50	6	63	20	40	22	4	10500	0,42	SNCU12T5ANER..	4	T401155-15	7015-T 5,5 Nm
MT245-063A22R05SN12	63	6	76	20	40	22	5	9000	0,58		5		
MT245-080B27R06SN12	80	6	93	22	50	27	6	7500	0,96		6		
MT245-100B32R07SN12	100	6	113	25	50	32	7	6500	1,65		7		
MT245-125B40R08SN12	125	6	138	29	63	40	8	5500	2,87		8		
MT245-160C40R10SN12	160	6	173	31	63	40	10	4500	4,35		10		
MT245-200C60R12SN12	200	6	213	32	63	60	12	4000	7,26		12		
MT245-250C60R14SN12	250	6	263	32	63	60	14	3500	13,6	14			

#### Нормальный шаг

MT245-050A22R05SN12	50	6	63	20	40	22	5	10500	0,39	SNCU12T5ANER..	5	T401155-15	7015-T 5,5 Nm
MT245-063A22R06SN12	63	6	76	20	40	22	6	9000	0,50		6		
MT245-080B27R08SN12	80	6	93	22	50	27	8	7500	0,88		8		
MT245-100B32R10SN12	100	6	113	25	50	32	10	6500	1,58		10		
MT245-125B40R12SN12	125	6	138	29	63	40	12	5500	2,80		12		
MT245-160C40R16SN12	160	6	173	31	63	40	16	4500	4,26		16		
MT245-200C60R18SN12	200	6	213	32	63	60	18	4000	7,20		18		
MT245-250C60R20SN12	250	6	263	32	63	60	20	3500	13,5		20		

	Марка твердого сплава										Основные размеры								
	P			M			K		N	S	H	ic	l	s	d1	r	b		
	HCP20	HCP25	HCP35	HCP20	HCP25	HCP35	HCP20	HCK10			HCP20		HCP20	мм					
SNCU12T5ANER-H	●			●			○				○		○	12,7	12,7	5,75	4,6	0,8	2,0
SNCU12T5ANER-SM		●			○									12,7	12,7	5,75	4,6	0,8	2,0
SNCU12T5ANER-SR			●			○								12,7	12,7	5,75	4,6	0,8	2,0
SNCU12T5ANER-G							●							12,7	12,7	5,75	4,6	0,8	2,0