


# MT288/290




## MT290...LN14

### Торцовые фрезы 90°

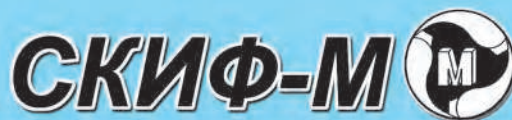

- \*Положительная геометрия.
- \*Исключительно высокая производительность.
- \*Тангенциальное крепление прочных СМП.

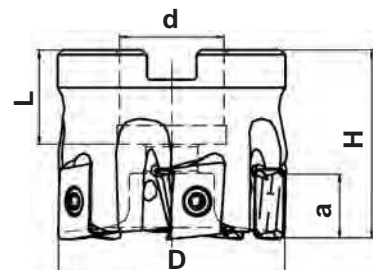

#### Нормальный шаг

#### Глубина резания до 14 мм

Обозначение	Размеры, мм						nmax RPM	kg		Кол.		
	D	a	L	H	d	Z						
MT290-050A22R04LN14	50	14	20	40	22	4	9000	0,3	LNKU140612ER-SR	4	T401155-15	7015-T 5,5 Nm
MT290-063A22R05LN14	63	14	20	40	22	5	8500	0,5				
MT290-080B27R07LN14	80	14	22	50	27	7	7500	0,9				
MT290-100B32R08LN14	100	14	25	50	32	8	7000	1,6				
MT290-125B40R09LN14	125	14	29	63	40	9	6000	3,0				
MT290-160C40R10LN14	160	14	31	63	40	10	5000	4,4				
MT290-200C60R12LN14	200	14	32	70	60	12	4500	7,7				
MT290-250C60R15LN14	250	14	32	70	60	15	3500	12,0				

#### Мелкий шаг

MT290-050A22R05LN14	50	14	20	40	22	5	9000	0,3	LNKU140612ER-SR	5	T401155-15	7015-T 5,5 Nm
MT290-063A22R08LN14	63	14	20	40	22	8	8500	0,6				
MT290-080B27R10LN14	80	14	22	50	27	10	7500	1,0				
MT290-100B32R12LN14	100	14	25	50	32	12	7000	1,7				
MT290-125B40R15LN14	125	14	29	63	40	15	6000	3,2				
MT290-160C40R20LN14	160	14	31	63	40	20	5000	4,6				
MT290-200C60R25LN14	200	14	32	70	60	25	4500	7,7				
MT290-250C60R30LN14	250	14	32	70	60	30	3500	12,0				

	Марка твердого сплава						Основные размеры											
	P		M		K		N		S		H		ic	l	S	d1	r	b
	HCSP40		HCSP40		HCSP40								мм					
LNKU140612ER-SR	●		●		○								11,0	15,0	6,35	4,3	1,2	1,8