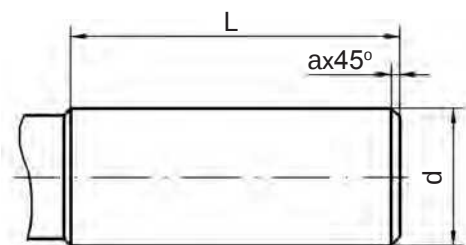
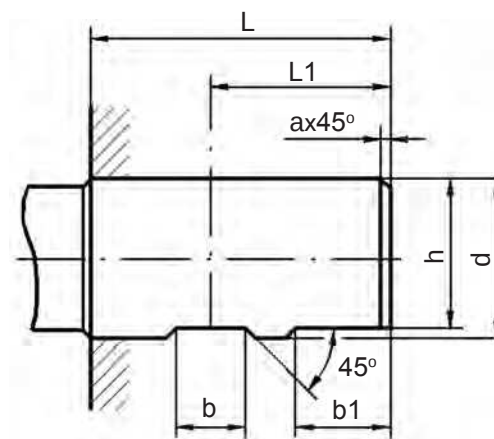
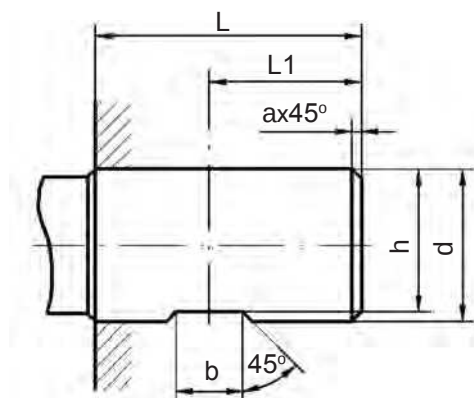



Присоединительные размеры концевых фрез, мм
Z - цилиндрический хвостовик DIN 1835 A

d_{h6}	L^{+2}_0	a
8	36	0,8
10	40	1,0
12	45	1,2
16	48	1,6
20	50	2,0
25	56	2,0
32	60	2,0
40	70	2,0
50	80	2,0
63	90	2,0


W - цилиндрический хвостовик с лысками типа Weldon DIN 1835 B


d_{h6}	h_{h11}	$b^{+0,05}_0$	$b1^{+1}_0$	L^{+2}_0	$L1^0_{-1}$	a
8	6,6	5,5	--	36	18	0,8
10	8,4	7	--	40	20	1,0
12	10,4	8	--	45	22,5	1,2
16	14,2	10	--	48	24	1,6
20	18,2	11	--	50	25	2,0
25	23,0	12	17	56	32	2,0
32	30,0	14	19	60	36	2,0
40	38,0	14	19	70	40	2,0
50	47,8	18	23	80	45	2,0
63	60,8	18	23	90	50	2,0