


Оправки HSK DIN 69893 для концевых фрез с хвостовиком типа Weldon

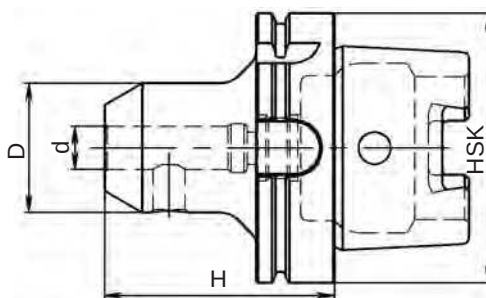

TH-HA063...W...H

длинное исполнение

$n_{max} = 8\ 000$ об/мин

Обозначение	Размеры, мм			
	HSK	d	D	H
TH-HA063W06H140	63	6	25	140
TH-HA063W08H140	63	8	28	140
TH-HA063W10H140	63	10	35	140
TH-HA063W12H140	63	12	42	140
TH-HA063W14H140	63	14	44	140
TH-HA063W16H140	63	16	48	140
TH-HA063W18H140	63	18	50	140
TH-HA063W20H140	63	20	52	140

TH-HA100...W...H

длинное исполнение

$n_{max} = 8\ 000$ об/мин

TH-HA100W06H160	100	6	25	160
TH-HA100W08H160	100	8	28	160
TH-HA100W10H160	100	10	35	160
TH-HA100W12H160	100	12	42	160
TH-HA100W14H160	100	16	48	160
TH-HA100W16H160	100	20	52	160

Оправки HSK DIN 69893 для концевых фрез с хвостовиком типа Weldon с внутренней подачей СОЖ

TH-HA063...W...H...AD

$n_{max} = 8\ 000$ об/мин

Обозначение	Размеры, мм			
	HSK	d	D	H
TH-HA063W16H080AD	63	16	48	80
TH-HA063W16H140AD	63	16	48	140
TH-HA063W20H080AD	63	20	52	80
TH-HA063W25H110AD	63	25	65	110
TH-HA063W32H110AD	63	32	72	110

TH-HA100...W...H...AD

$n_{max} = 8\ 000$ об/мин


TH-HA100W16H100AD	100	16	48	100
TH-HA100W16H160AD	100	16	48	160
TH-HA100W20H110AD	100	20	52	110
TH-HA100W20H160AD	100	20	52	160
TH-HA100W25H120AD	100	25	65	120
TH-HA100W32H120AD	100	32	72	120
TH-HA100W40H120AD	100	40	80	120

TH-HA125...W...H...AD

$n_{max} = 8\ 000$ об/мин

TH-HA125W25H110AD	125	25	65	110
TH-HA125W32H120AD	125	32	72	120
TH-HA125W40H120AD	125	40	80	120
TH-HA125W50H130AD	125	50	100	130

Винт крепления "Weldon"



d, мм	G, мм	L, мм
6	M 6	10
8	M 8	10
10	M 10	12
12	M 12	16
14	M 12	16
16	M 14	16
18	M 14	16
20	M 16	16
22	M 16	16
25	M 18x2	20
32	M 20x2	20
40	M 20x2	25
50	M 24x2	25